




# RSG4



Стойка высотой 42U с уголками, «смотрящими» наружу, и с регулируемым профилем для глубины 920–1100 мм.

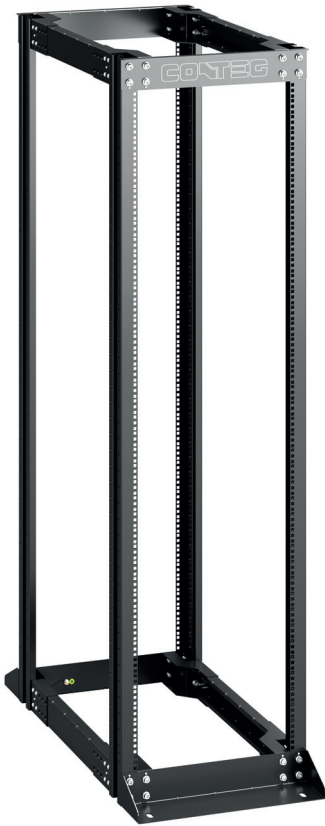

## RSG4

1500

## ОСНОВНЫЕ ПРЕИМУЩЕСТВА





( 1500 )

HDWM

: RAL 9005

## ОПИСАНИЕ

- : 42, 47U
- : 550
- : 500–680
- 710–890
- 920–1100 ( 30 )
- 1500
- IP 00 ( )
- 2,0
- — RAL 9005
- 2 19"
- L- « »
- (X-« »)
- " " "
- " " "
- " " "

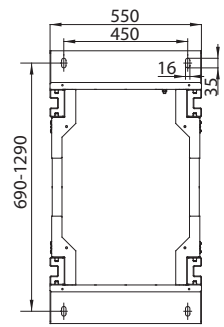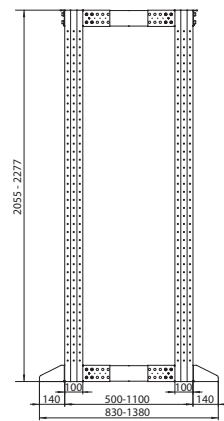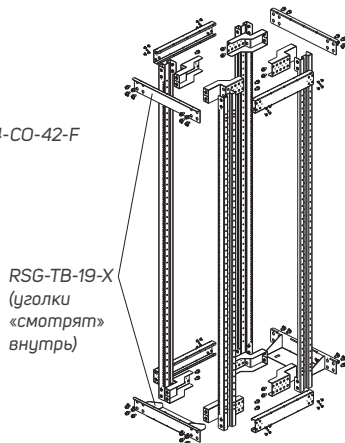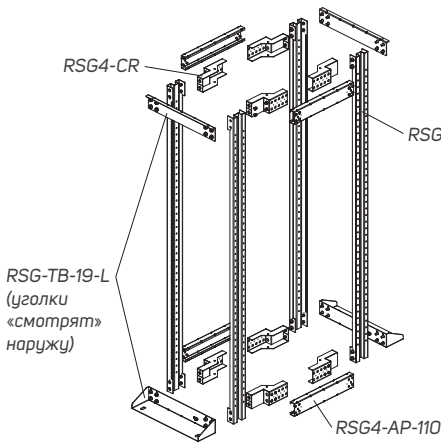

			42U. 2 055		550 47U. 2 277		550		
			500–680	710–890	920–1100	500–680	710–890	920–1100	
RSG4-CO-42-F	19"	« »	42U	2 <sup>1</sup>	2 <sup>1</sup>	2 <sup>1</sup>	–	–	–
RSG4-CO-47-F	19"	« »	47U	–	–	–	2 <sup>1</sup>	2 <sup>1</sup>	2 <sup>1</sup>
RSG4-CR				1	1	1	1	1	1
RSG4-TB-19-L		« » ;		1 <sup>2</sup>	1 <sup>2</sup>	1 <sup>2</sup>	1 <sup>2</sup>	1 <sup>2</sup>	1 <sup>2</sup>
RSG4-TB-19-X		« » ;							
RSG4-AP-68			500–680	1	–	–	1	–	–
RSG4-AP-89			710–890	–	1	–	–	1	–
RSG4-AP-110			920–1100	–	–	1	–	–	1

